SELIT *STYLE*

Acoustic Panel

Installation instructions


Prior to installation

Store the panels horizontally at room temperature for at least 12 hours.
Due to their low weight, the acoustic panels can easily be installed by a single person.

Equipment


- Panel
- Folding rule
- Pen
- Protective gloves
- Steel square
- Utility knife
- Caulking gun
- Polymer mounting glue or black screws.

Installation

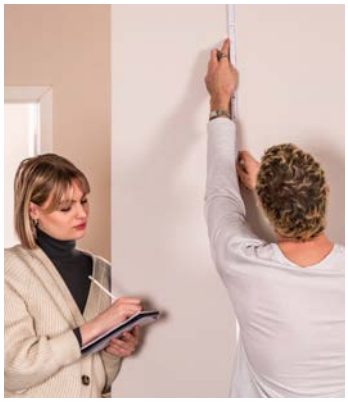

Step 1

The surface should be even, stable, clean, dry and free of dust and grease. Remove dust and dirt from the wall. Old nails or screws should also be removed. Then measure the wall surfaces to be covered and transfer the measurements to the panels.

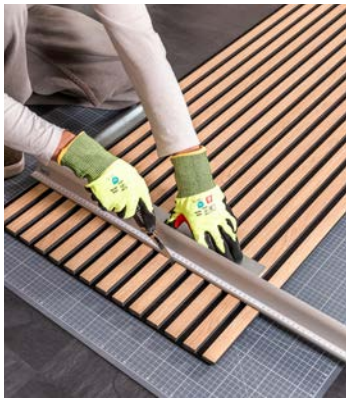

Step 2

Place a non-slip steel square on the marking. Now cut the panel along the steel square. Our panels can be easily cut with a utility knife rather than a circular saw. No dust or sawdust is generated, and the process is quiet.



Step 3

Apply a continuous bead of polymer mounting glue to the back of the panels, e.g. Soudal Fix All High Tack, Fix All Turbo or Fix All Flexi. Due to the significantly lower weight compared to conventional acoustic panels, gluing is usually sufficient.

For non-load-bearing substrates and for ceiling installation, we recommend additional screw mounting. Four horizontal screw rows with three screws each are sufficient for this.



Step 4

Now simply press the panel evenly onto the wall and enjoy the cosy atmosphere. You can further enhance the wall with additional design elements. Discover our accessories (black lighting skirtings, black lighting finishing profiles and black diffusers).

SELIT Enjoy your flooring

A BRAND OF nmc

NMC AG
Gert-Noël-Strasse
4731 Eynatten, Belgien
info@nmc.be

MADE IN BELGIUM
with 100 %
green electricity

the easiest panel
theeasiestpanel
the-easiest-panel.com